


DIMENSIONS: TTR 4400

Wheels	X	Y
7.50x16	261	1198
6.50x16	246	1131
240/70 R15 Garden	217	1217
29x12.50-15 Terra	233	1375
29x12.50-15 Green	233	1375
29x12.50-15 Xtra-Traction	233	1375

*Height calculated with the operator of average height sitting (mm 1750)

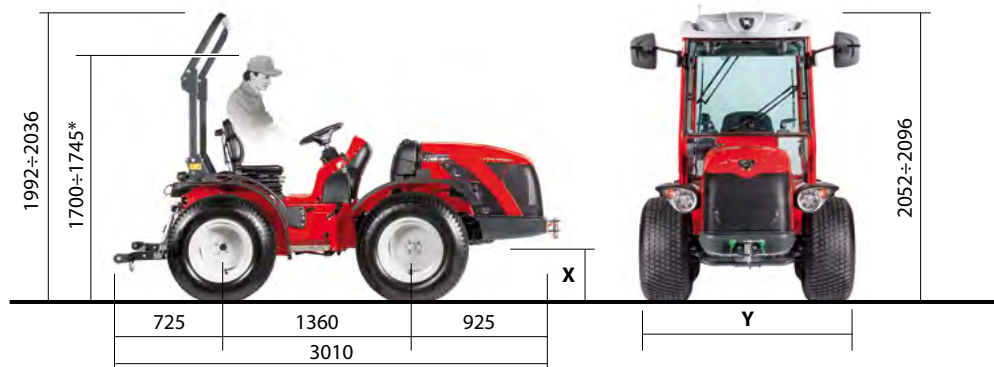

TECHNICAL DATA: TTR 4400 HST

THE 30 SERIES



TTR 4400

Chassis	ACTIO™ Full chassis with oscillation • RGS™ Reversibility • Steering wheels • Equal wheel drive			
Engine Type	Direct-injection diesel			
	Emissions regulations: Stage IIIA	N° cylinders: 3 – Natural/internal induction		
	Displacement: cc. 1642	Power kW/HP (97/68/CE): 28/38		
	Maximum engine revs: 3000	Torque max (Nm/revs) 113/1200		
	Cooling: water	Tank capacity (litres) 30		
Transmission	Hydrostatic with 3 speed range – Stepless speed variator from 0 to 30 Km/h			
PTO	Rear, 540/1000 rpm			
Shaft	Profile 1" 3/8 with 6 splines with facilitated engagement			
Transmission clutch	Hydraulic control			
Drive disengagement	Mechanical rear control			
Rear hydraulic lift	3-point hitch - Capacity (Kg): 910			
	Valve to control power lift descent speed			
Operating Pressure (bar)	160			
Steering	With 1 double-acting piston and connecting bar with "Load sensing" system			
Brakes	Standard: rear hydraulic drum brakes			
	Emergency and parking brakes: acting on rear brakes			
Platform	Mounted on Silent Block			
Tyres	7.50 16	6.50x16	240/70 R15 Garden	29x12.50-15 Terra • Green • Xtra-Traction
Weight in order of speed (Kg)	With rollbar: 1275		With cab: 1440	

Standard Features

- RGS™ reversible control tower • Handles on mudguards • Flexible widenings for rear and front mudguards
- Rear and front mechanical-control differential lock • 1-pump hydraulic system for hydrostatic transmission
- Rear hydraulic system with 4 levers: 2 double-acting distributors with floating position + 1 single-acting distributor with floating position + 1 double-acting distributor with floating position replicated at the front + 1 oil return valve (tot. 8 quick couplings) • Fix type lifting arms and coupling balls, cat. 1-1N • Adjustable padded seat with safety belts • Rear partially foldable roll bar • Adjustable rims • Rear tow hitch • Front tow hitch
- Multifunctional digital instrument tachometer/revolution counter, Km/h and PTO • Battery • 12V 7-pole / single-pole outlet • Safety starting device on the seat, the clutch and the PTO • "Speed-fix" system: to establish the speed of the working vehicle

Optional Features

- Cab with air conditioning system suspended on Silent-Block • Power lift and hydraulic outlets controlled by ON/OFF Joystick • Front hydraulic power lift • Rear double-acting power lift • Couplers for top fitting equipment with front third hitch • Rear short lifting arms • Integral braking fitted to all four wheels • Working light
- Containment sides for standard seat • Grammer fabric cover seat with pneumatic suspension (available with cabin)
- Pair of front/rear wheel ballasts

The description and illustrations in this brochure are provided simply for information purposes; they are not binding and may be varied at any time without notice.

ANTONIO CARRARO SPA
Via Caltana, 24
35011 Campodarsego Padova ITALY
info@antoniocarraro.it
antoniocarraro.com

COD. 4 7318 139 - 10/2011