


DIMENSIONS: TIGRE

TIGRE 4000

Wheels

Ant./Post.	X	Y
7.50-16	275	1105
7.5L-15	255	1168
29-12.50-15	255	1333
6.50-16	260	1055
260/70 R16	275	1242

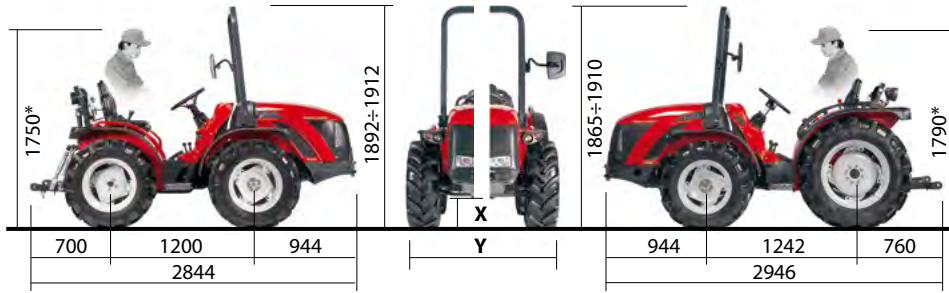

TIGRE 4400F

Wheels

Ant.	Post.	X	Y
7.50-16	300/70 R20	260	1276
29x12.50-15	36x13.50-15	215	1438
260/70 R16	300/70 R20	260	1276
7.50-16	9.5 R20	260	1232

*Height calculated with the operator of average height sitting (mm 1750)

TECHNICAL DATA: TIGRE / TIGRE F



TIGRE 4000

TIGRE 4400F

ACTIO™ chassis	Full chassis with oscillation +/- 15° • Steering wheels	Full chassis with oscillation +/- 15° • Steering wheels
	4 equal wheel drive	4 unequal wheel drive • Rear final drive
Engine Type	Yanmar - Direct-injection diesel - Natural/internal induction - Emissions regulations: Stage 3A	
N° Cylinders	3	3
Displacement (CC)	1331	1642
Power kW/HP (97/68/CE)	22,8/31	28/38
Maximum engine revs	3000	3000
Torque max (Nm/revs)	86,2/1700	111/1200
Cooling	Water	Water
Tank Capacity (litres):	30	30
Transmission	Mechanical gearbox with assisted changes and 12 gears (8 FW + 4 RV)	
PTO	Standard speed 540 rpm and synchronised at all gear speeds	
	Multi-disk clutch in oil bath with independent engagement/disengagement under load (optional for 4000)	
Shaft	Profile 1" 3/8 with 6 splines with facilitated engagement	
Hydraulic system	Flow rate 30 litres/min	Flow rate 30 litres/min
Operating Pressure (bar)	125	160
Rear hydraulic lift	3-points hitch Cat. 1 and 1N - Adjustable third hitch and vertical tie-rods	
Capacity (Kg)	850	1000
Steering	Hydraulic	Hydraulic power-steering with "Load Sensing" system
Brakes	Standard and parking brakes	Standard and parking brakes
	Steering brakes (optional)	Steering brakes
Platform	Suspended on vibration dampers	
Weight in order of speed (Kg)	1050	1250
Emergency	Foldable front protection roll bar - Integrated rear safety bar	
Electrical system	<ul style="list-style-type: none"> • Backlit analogue/digital dashboard with fuel level and water temperature gauges, indicator LED's, digital PTO rev display, acoustic and visual emergency alarms and anti-glare dome • Tachometer/revolution counter • Halogen headlamps • 12V 7-pole / single-pole outlet • Claxon • Alternator 40Ah (for 4000) - 55Ah (for 4400) 	
Standard Features	<ul style="list-style-type: none"> • Front and rear differential lock • Std/ Synchro PTO control • Mechanical disengagement control for front drive wheels (for 4400F) • Adjustable suspension seat • Safety belts • Handles on mudguards • Flexible widenings for rear and front mudguards (optional for 4000) • Rear tow hitch • Front tow hook integrated into bumper • 1 double acting distributor with floating position and 2 quick couplings (opt. for 4000) 	
Optional Features	<ul style="list-style-type: none"> • Pneumatic suspension for the seat • Hydraulic power lift with draft and position control (for 4400F) • Rear revolving working light • Front and rear wheel ballasts • Up to 4 types of front hydraulic system with a maximum of 4 hydraulic couplers (for 4400F) • Adjustable steering wheel (for 4400F) 	

The description and illustrations in this brochure are provided simply for information purposes; they are not binding and may be varied at any time without notice.

ANTONIO CARRARO SPA
Via Caltana, 24
35011 Campodarsego Padova ITALY
info@antoniocarraro.it
antoniocarraro.com

COD. 4 7318 140 - 10/2011